

Roof Fan



Description

Order Number:	6095A3000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54, Type 1, 12
Approvals:	CE, cURus

Technical Data


Operating Temperature Range:	-10°C - 55°C
Air flow unimpeded:	970 m³/h
Static pressure:	750 Pa
Mounting:	top mounted
Dimensions A x B x C (D+E):	147 x 457 x 457 mm
Weight:	7 kg
Cut out dimensions:	291 x 291 mm
Voltage / Frequency:	115 V ~ 60 Hz
Rated current:	1.9 A
Power consumption:	225 W
Degree of separation:	85% - DIN 24185
Filter class:	G3 (Aluminium optional)
Noise level:	76 dB(A)
Connection:	4 pole connector

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Performance graph:

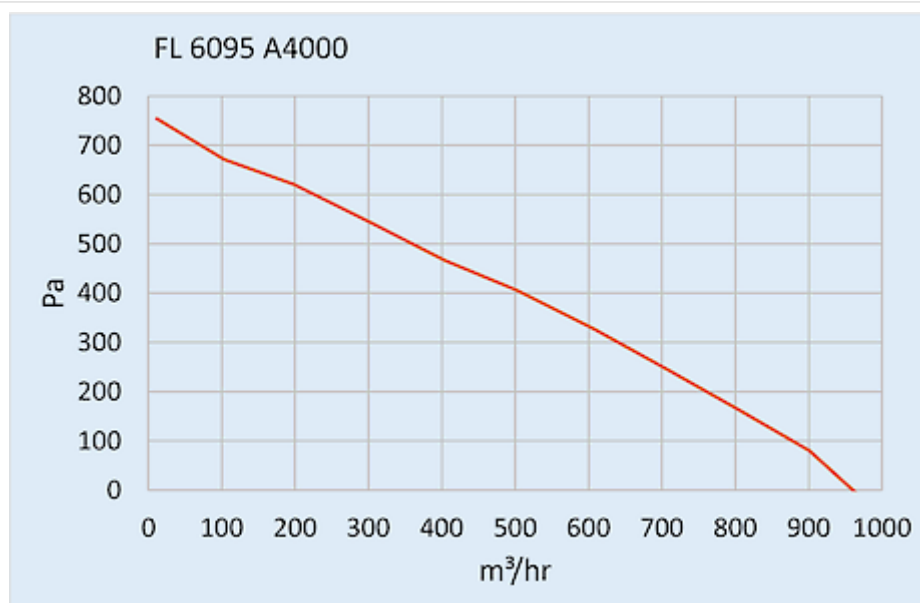

[click image to enlarge](#)

Cut Out Dimension:

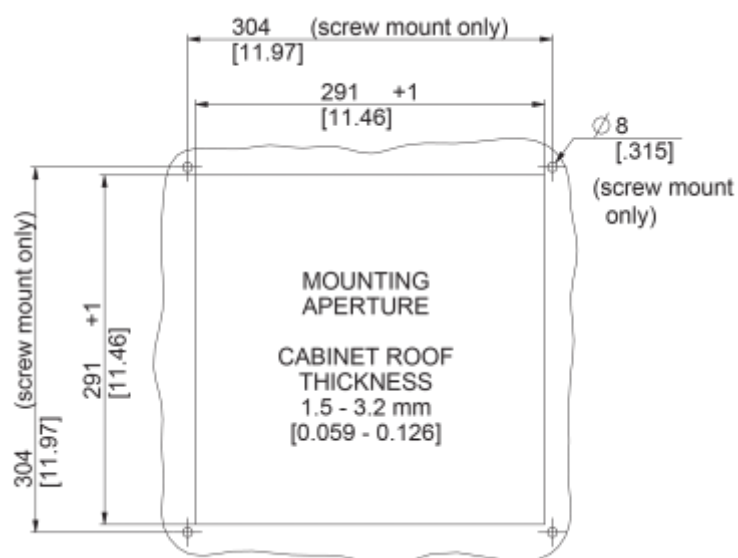

[click image to enlarge](#)

Order Information

Taric code	84145915
GTIN (EAN)	5350604100893