

SOLITHERM PROTEC



Description

Order Number:	87622584
Brand Name:	SOLITHERM PROTEC
Housing Material:	Stainless steel AISI 316 (V4A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	With metal mesh filter
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278

Technical Data

Cooling capacity L35L35 (EN14511-3):	6000 W @ 50 Hz 6200 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	4800 W @ 50 Hz 5400 W @ 60 Hz
Enclosure heater:	2,000 W
Compressor type:	Scroll
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1140 g / 40.2 oz
High / low Pressure:	32 / 6 bar 460 / 88 psi
Operating Temperature Range:	-40°C - 55°C
UL temperature range:	-40°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 935 / 1480 m³/h Enclosure air circuit: 1080 / 1480 m³/h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	1,135 x 455 x 390 mm
Weight:	85 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V - 60 Hz 3~
Current L35L35:	5.9 A @ 50 Hz 6.2A @ 60 Hz
Starting current:	57 / 44 A
Max. current:	9.8 A
Nominal power L35L35:	3.0 kW @ 50 Hz 3.8 kW @ 60 Hz
Max. power:	6.3 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA


Rated current compressor:	6.4 A
Full load current fans:	1.3 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

Performance graph:

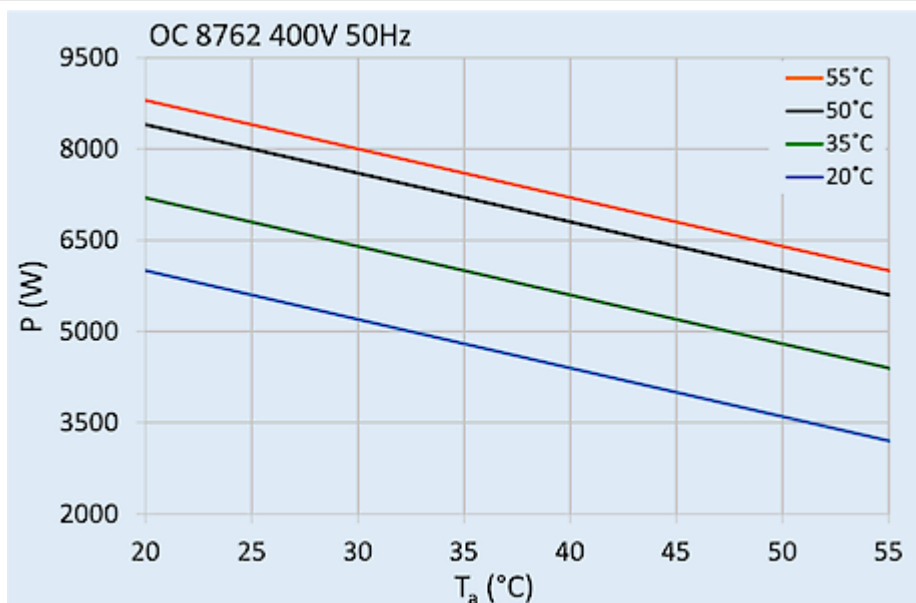

[click image to enlarge](#)

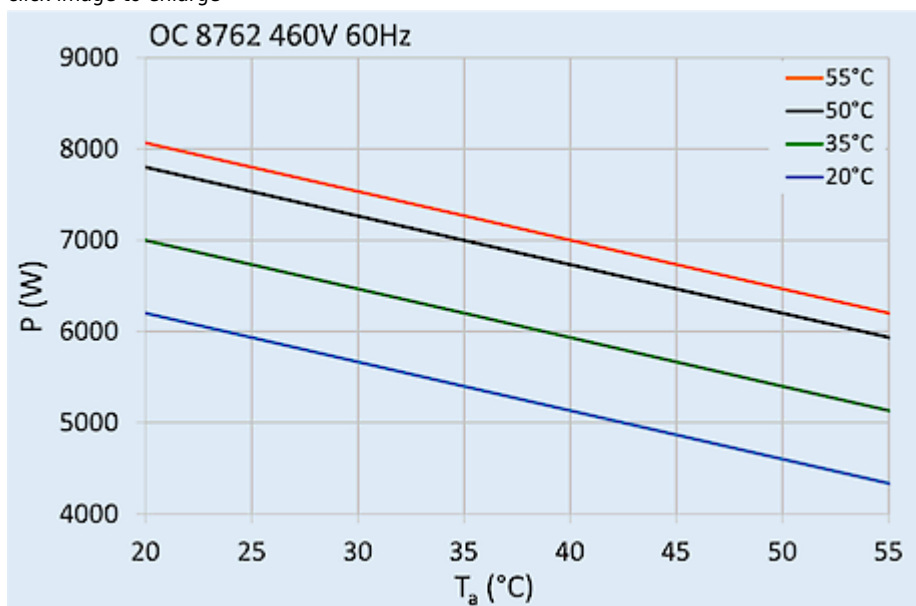

[click image to enlarge](#)

Order Information

Taric code

84158200