

Filter Fan



Description

Order Number:	4023A4000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	ABS Plastic
Ingress Protection:	IP 54, Type 12, 3R
Optional:	Different housing colors available on request
Approvals:	CE, cURus, cULus, CSA

Accessories:



[Hose-proof protection hood FC 4000 000](#)



[Hose-proof protection hood FC 4000 000 FDA](#)



[Adjustable Thermostat NO](#)

Technical Data

Operating Temperature Range:	-10°C - 55°C
Air flow unimpeded:	22 m³/h
Static pressure:	41 Pa @ 50 Hz 57 Pa @ 60 Hz
Dimensions A x B x C (D+E):	106.5 x 106.5 x 79.5 mm
Weight:	0.54 kg
Cut out dimensions:	92.5 x 92.5 (+0.5) mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.08 A / 0.07 A
Power consumption:	12 W / 11 W
Degree of separation:	85% - DIN 24185
Wall thickness:	1 - 2 mm
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	37 dB(A) @ 50 Hz 42 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

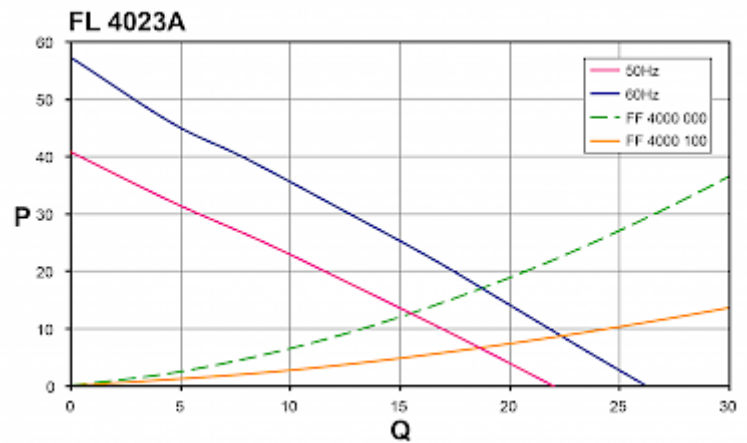

[click image to enlarge](#)

Cut Out Dimension:

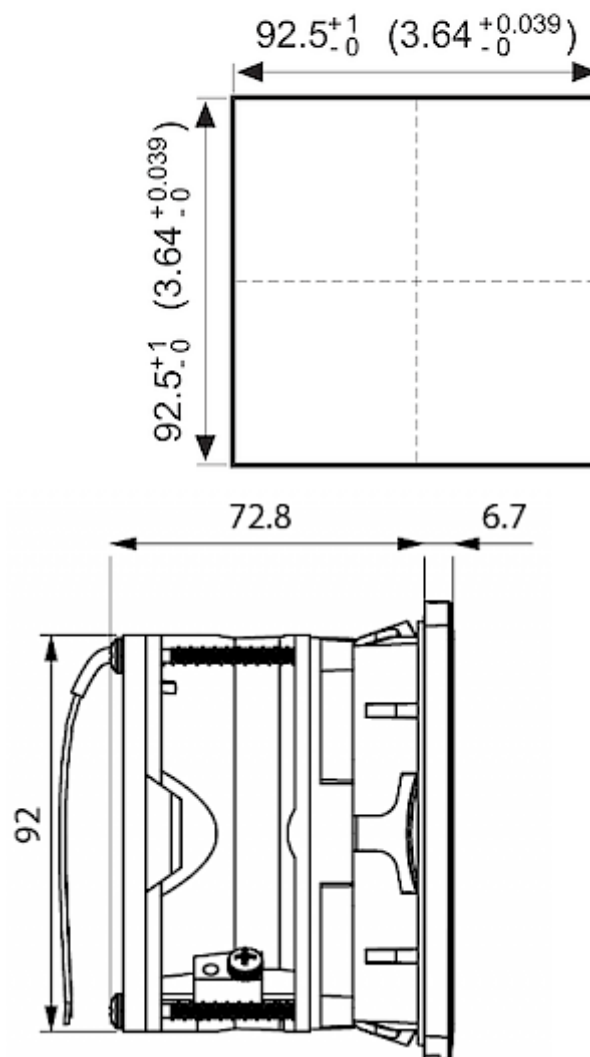

[click image to enlarge](#)

Order Information

In RAL 9005	4023A4003
With TYPE 3R protection part no.	4023A4033
Taric code	84145915
GTIN (EAN)	5350604100183