

## Control Cabinet Air Conditioner



### Description

|                            |                           |
|----------------------------|---------------------------|
| <b>Order Number:</b>       | 43150001                  |
| <b>Brand Name:</b>         | COMPACT INDOOR            |
| <b>Colour:</b>             | RAL 7035                  |
| <b>Housing Material:</b>   | Mild steel, powder coated |
| <b>Ingress Protection:</b> | IP 54 / TYPE 12           |
| <b>Approvals:</b>          | CE, cURus, cULus          |


## Technical Data

|                                              |                                                                            |
|----------------------------------------------|----------------------------------------------------------------------------|
| <b>Cooling capacity L35L35 (EN14511-3):</b>  | 1500 W @ 50 Hz<br>1630 W @ 60 Hz                                           |
| <b>Cooling capacity L35L50 (EN14511-3):</b>  | 1220 W @ 50 Hz<br>1320 W @ 60 Hz                                           |
| <b>Compressor type:</b>                      | Reciprocating compressor                                                   |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430                                                               |
| <b>Refrigerant charge:</b>                   | 420 g / 14.8 oz                                                            |
| <b>High / low Pressure:</b>                  | 25.5 / 6 bar<br>370 / 88 psig                                              |
| <b>Operating Temperature Range:</b>          | 10°C - 55°C                                                                |
| <b>Air flow volume (system / unimpeded):</b> | Ambient air circuit: 480 / 850 m³/h<br>Cabinet air circuit: 385 / 550 m³/h |
| <b>Mounting:</b>                             | Wall mounted                                                               |
| <b>Dimensions A x B x C (D+E):</b>           | 980 x 395 x 260 mm                                                         |
| <b>Weight:</b>                               | 39.7 kg                                                                    |
| <b>Cut out dimensions:</b>                   | 920 x 335 mm                                                               |
| <b>Voltage / Frequency:</b>                  | 230 V ~ 50/60 Hz                                                           |
| <b>UL Voltage / Frequency:</b>               | 230 V ~ 60 Hz                                                              |
| <b>Current L35L35:</b>                       | 4.6 A @ 50 Hz<br>5.1 A @ 60 Hz                                             |
| <b>Starting current:</b>                     | 21.2 A                                                                     |
| <b>Max. current:</b>                         | 5.6 A                                                                      |
| <b>Nominal power L35L35:</b>                 | 800 W @ 50 Hz<br>920 W @ 60 Hz                                             |
| <b>Max. power:</b>                           | 1.17 kW                                                                    |
| <b>Fuse:</b>                                 | 10 A (T)                                                                   |
| <b>Short-circuit current rating:</b>         | 5 kA                                                                       |
| <b>Connection:</b>                           | Connection terminal block                                                  |

Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).


> [Overview Product Group COMPACT INDOOR - reliable and economical](#)

### Performance graph:

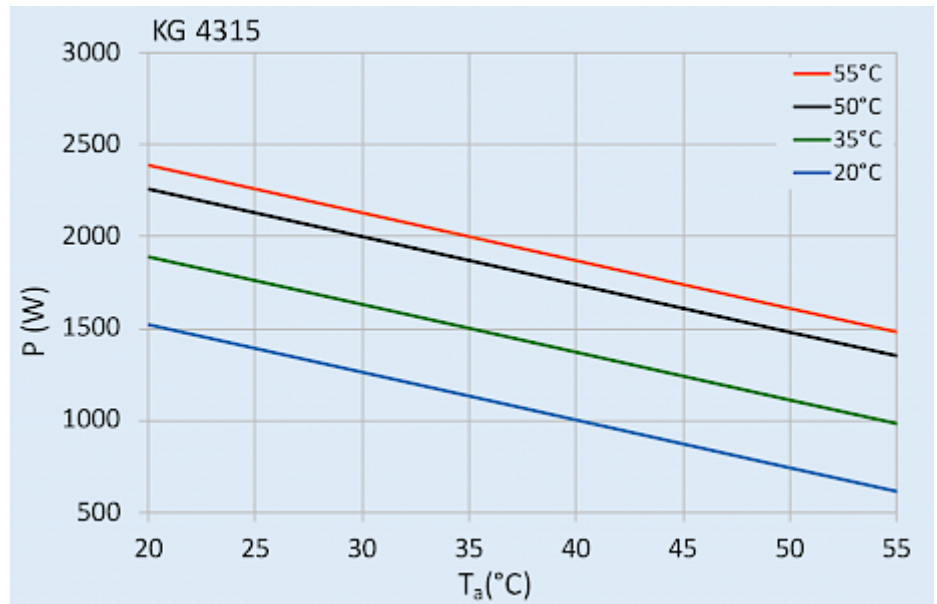


[click image to enlarge](#)

### Air flow:

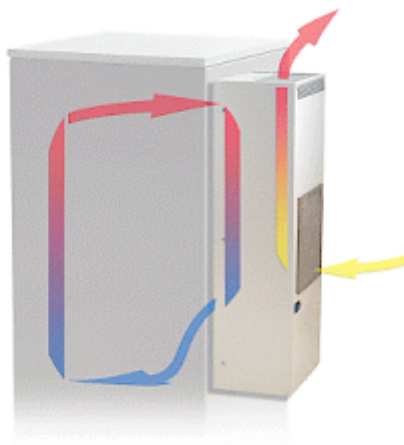

[click image to enlarge](#)

### Cut Out Dimension:

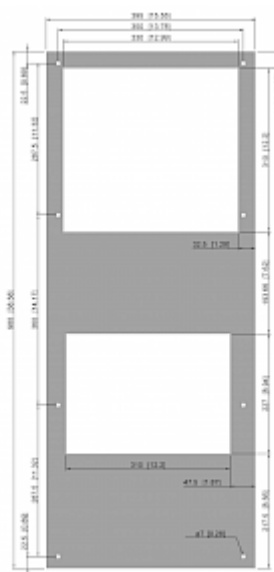

[click image to enlarge](#)

## Order Information

|                                             |                      |
|---------------------------------------------|----------------------|
| <b>Stainless steel housing part no.</b>     | 4315002              |
| <b>With condensate evaporation part no.</b> | 43150101             |
| <b>Box dimensions</b>                       | 1,015 x 443 x 295 mm |
| <b>Gross weight</b>                         | 42.5 kg              |
| <b>Taric code</b>                           | 84158200             |